


Modular Flake-Ice Machine up to 120 Kg




Stainless Steel

Electronic Controls



MF 26 + B193
(sold separately)



MF 26 + B393 + KBT103
(sold separately)



MF 26 + B393 + KBT103
(sold separately)



MF 26 + RB400
(sold separately)



Features

- Modular Flake-ice machine, production up to 120 kg in 24 hours.
- Stainless steel "scotch-brite" finish; rounded corners for enhanced aesthetics and ergonomics; top cover in ABS plastic.
- Removable side panels on all four sides to aid routine maintenance and servicing.
- Sturdy evaporator in stainless steel AISI304, auger in AISI430.
- State of the art ice Breaker in special alloy.
- Reduced-maintenance, self-lubricating gear-reducer.
- Oversized hermetic compressor.
- Choice of air or water-cooled condenser.
- Electronic control board with self diagnostic and malfunction alarms.
- Produces Flake Ice, extruded at a temperature just below 0°C, contains 25% residual water content, hence very rich in moisture.

MF 26 Technologies



		24h			
		10°: 10°C	21°: 15°C		
		[kg]	[lbs]	[kg]	[lbs]
MF 26 AS		120	264	110	242
MF 26 WS		120	264	106	234
					 [WxDxH mm] 563x536x525
					 [WxDxH inches] 223/16" x 211/8" x 205/8"
					 [v/Hz/ph] 230/50/1
					 R 134 a

This product qualifies for the following listings:



Humidity 25%

Ice in its most natural form, made at a temperature just below zero degrees Celsius, contains 25% residual water content, making it very moist. Its flake shape makes it extremely versatile and very simple to use effectively.

2 Years Warranty


Subject to certain limitations and exclusions

Certified ISO 9001:2000

www.scotsman-ice.it
www.scotsman-ice.com

Models and specifications are subject to change without notice.

Modular Flake-Ice Machine up to 120 Kg

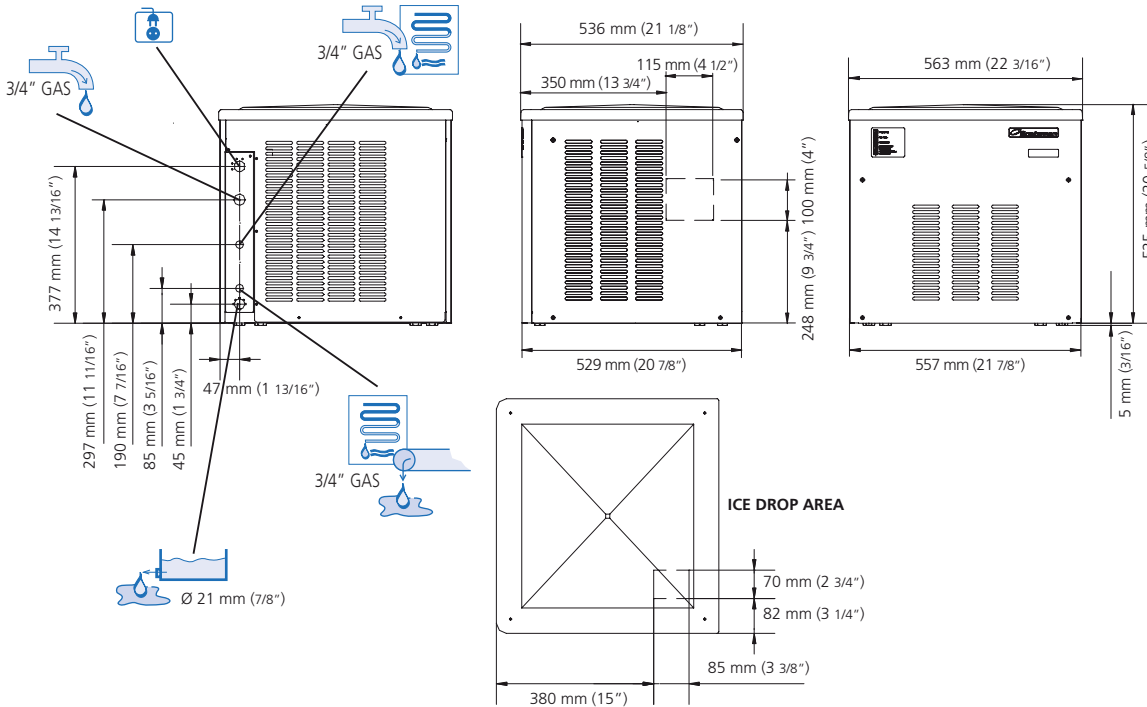

MF 26 AIR COOLED

°C \ °F	50°		60°		70°		90°	
	10°	15°	21°	32°	10°	15°	21°	32°
10°	120	116	112	104	120	116	112	104
50°	264	256	247	229	264	256	247	229
21°	114	110	106	98	114	110	106	98
70°	251	242	234	216	251	242	234	216
32°	103	99	95	87	103	99	95	87
90°	227	218	209	192	227	218	209	192
38°	96	92	88	80	96	92	88	80
100	212	203	194	176	212	203	194	176



MF 26 WATER COOLED

°C \ °F	50°		60°		70°		90°	
	10°	15°	21°	32°	10°	15°	21°	32°
10°	120	116	112	104	120	116	112	104
50°	264	256	247	229	264	256	247	229
21°	110	106	102	94	110	106	102	94
70°	242	234	225	207	242	234	225	207
32°	105	101	97	89	105	101	97	89
90°	231	223	214	196	231	223	214	196
38°	103	99	95	87	103	99	95	87
100	227	218	209	192	227	218	209	192



Minimum

10°C (50°F)

5°C (41°F)

-10%

1 BAR
14 psi



Maximum

40°C (104°F)

35°C (95°F)

+10%

5 BAR
70 psi

	Icon	Unit	Unit	Unit	Unit	Unit	Unit	Unit	Unit	Unit	Unit
MF 26 AS	Flake icon	[Btu/h]	[W]	[Ømm²]	[W]	FUSE	[kWh] - 100 Kg	[l/h]	[gal/h]	[kg]	[lbs]
MF 26 AS	Flake icon	4090	1200	3 x 1,5	500	10 A	10.4	4	1	45	99
MF 26 WS	Water icon	4090	1200	3 x 1,5	500	10 A	11.7	29	7,6	45	99

CONTACT POINTS:

Europe
Scotsman Europe-Frimont S.p.A.
Via Puccini, 22
20010 Pogliano (Milano) Italy
Ph: (+39) 02-93960208
Fax: (+39) 02-93960201
scotsman.europe@frimont.it

Asia and Pacific
Scotsman Ice Systems-Frimont S.p.A. (R.O.)
627A Aljunied Road-#04-04 Biztech Centre
Singapore 389842
Ph: (+65) 6738 5393
Fax: (+65) 6738 1959
scotsice@singnet.com.sg

China
Scotsman Ice Systems (Shanghai) Co. Ltd
613 Kaixuan Road, Building G
Shanghai, China 200051
Ph: (+86) 2161526100
Fax: (+86) 2161526020
sales@enods.com.cn - service@enods.com.cn

Middle East & N. Africa
Scotsman Ice Systems Dubai Office
P.o. Box 21648
Sharjah - U.A.E.
Ph: (+97) 16-5773-164
Fax: (+97) 16-5773-165
scotsman@eim.ae

South Africa
Scotsman Ice Systems SA (PTY) Ltd.
10, Rhodes Street - Kensington B
P.o. Box 44 - Riverclub 2149
Ph: (+27) 11-7898400
Fax: (+27) 11-7898411
scotsman@telkomsa.net

USA, Canada, Latin America
Scotsman Ice Systems USA
775 Corporate Woods Parkway
Vernon Hills, IL 60061
Ph: (+1) 847 215-4550
Fax: (+1) 847 913-9844
customerservice@scotsman-ice.com