


Modular Flake-Ice Machine up to 200 Kg



ABS plastic top cover



Electronic Controls




Stainless Steel



Features

- Modular Flake-ice machine, production up to 200 kg in 24 hours.
- Stainless steel "scotch-brite" finish; rounded corners for enhanced aesthetics and ergonomics; top cover in ABS plastic.
- Removable side panels on all four sides to aid routine maintenance and servicing.
- Sturdy evaporator in stainless steel AISI304, auger in AISI430.
- State of the art ice Breaker in special alloy.
- Reduced-maintenance, self-lubricating gear-reducer.
- Oversized hermetic compressor.
- Choice of air or water-cooled condenser.
- Electronic control board with self diagnostic and malfunction alarms.
- Produces Flake Ice, extruded at a temperature just below 0°C, contains 25% residual water content, hence very rich in moisture.
- CFC free R-404A Refrigerant
- 2 years manufacturer warranty

MF 36 Technologies

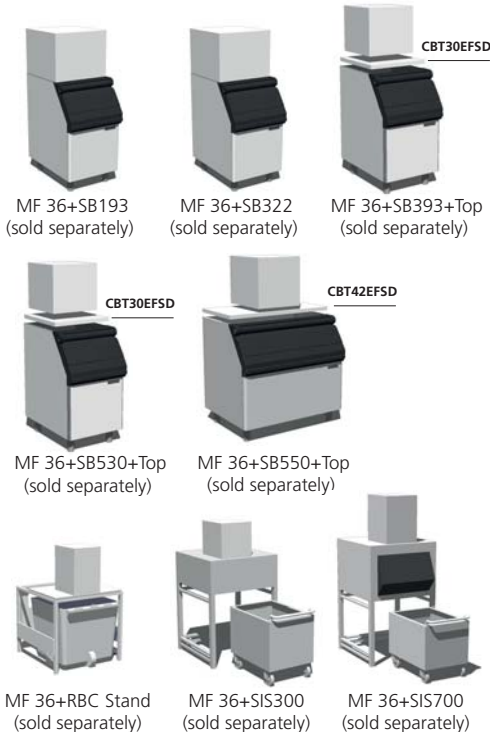

		24h				 [WxDxH mm] 564x536x531
		10°: 10°C	21°: 15°C	[kg]	[lbs]	
MF 36 AS		200	441	185	408	[WxDxH inches] 223/16" x 211/8" x 207/8"
MF 36 WS		200	441	190	418	
				 [v/Hz/ph] 230/50/1		 R 404 A



Ice in its most natural form, made at a temperature just below zero degrees Celsius, contains 25% residual water content, making it very moist. Its flake shape makes it extremely versatile and very simple to use effectively.

Residual water contents 25%

This product qualifies for the following listings:



2 Years Warranty


Subject to certain limitations and exclusions

Certified ISO 9001:2000

www.scotsman-ice.it
www.scotsman-ice.com
www.scotsman-ice-on-tablet.com

Models and specifications are subject to change without notice.

Modular Flake-Ice Machine up to 200 Kg

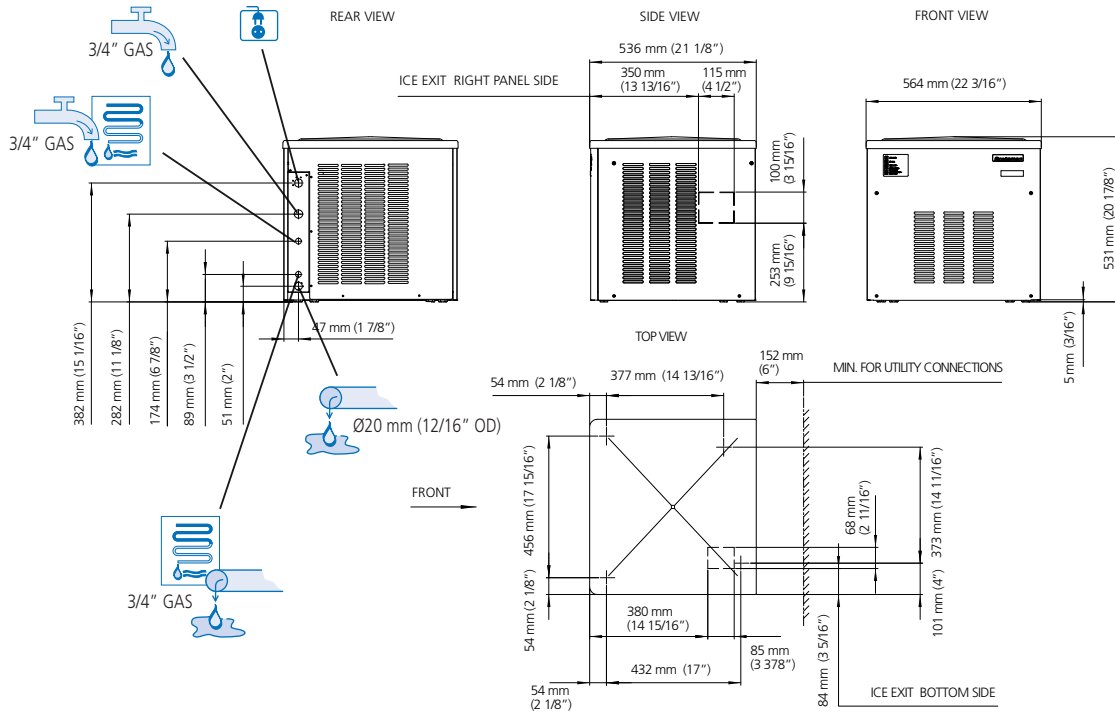


MF 36 AIR COOLED

°C °F	°C				kg
	50° 10°	60° 15°	70° 21°	90° 32°	
10°	200	193	186	172	kg
50°	441	425,5	410	379	lbs
21°	192	185	178	164	kg
70°	423	408	392	362	lbs
32°	169	162	155	141	kg
90°	372,5	357	342	311	lbs
38°	153	146	139	125	kg
100	337	322	306	275,5	lbs

MF 36 WATER COOLED

°C °F	°C				kg
	50° 10°	60° 15°	70° 21°	90° 32°	
10°	200	193	186	172	kg
50°	441	425,5	410	379	lbs
21°	197	190	183	169	kg
70°	434	419	403	372,5	lbs
32°	189	182	175	161	kg
90°	417	401	386	355	lbs
38°	183	176	169	155	kg
100	403	388	372,5	342	lbs

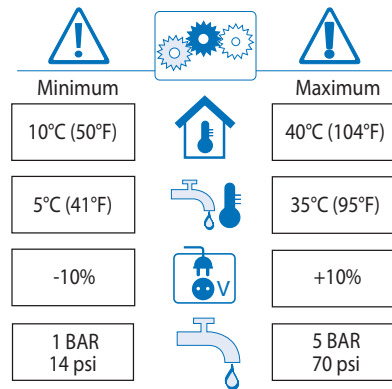

	±C° ±C°	[Btu/h] [W]	[Ømm²]	[W]	FUSE	100 Kg [kWh] - 100 Kg	[l/h]	32°C 90°F 21°C 70°F [gal/h]	[kg] [lbs]	[kg] [lbs]
MF 36 AS	±C°	6400 1875	3 x 1,5	760	10 A	11	6.5	1.7	49 108	56 123
MF 36 WS	±C°	6400 1875	3 x 1,5	760	10 A	9.7	102	27	49 108	56 123

CONTACT POINTS:

Europe
 Scotsman Europe-Frimont S.p.A.
 Ph/Fax +39-0293960208 / 0293960201
 scotsman.europe@frimont.it
 Paolo Moro

Middle East & N. Africa
 Scotsman-Frimont Regional Office (ME/NA)
 Ph/Fax +97-16 5262944 / 165262946
 m.dawood@frimont.ae
 fernando.m@frimont.ae

Asia and Pacific
 Scotsman Industries (S) PTE. L.T.D.
 Ph/Fax +65-67385393 / 67381959
 scotsman@scotsman.com.sg
 Andrea Tronci

South Africa
 Scotsman SA (Pty) Ltd - Ice Systems (Pty) Ltd
 Ph +27-0105900609 / 0877200245/6/7/8
 Fax: +27-118264123 / 0866340803
 stuart@scotsmansa.co.za - jennifer@scotsman.co.za

India
 Scotsman Group India
 Ph/Fax : +91-1244002459 / direct 9560072459
 david.owen@scotsman.com.sg

Spain
 Scotsman España, S.L.U. c/ Galapagar, 12
 Ph/Fax +34-911109796 / 916337423
 scotsman@scotsman-espana.es
 Daniel Doblado

China
 Scotsman Ice Systems (Shanghai)
 Ph/Fax : +86-2161313200 / 2161313330
 scotsman.shanghai@scotsman-china.com
 Andrew Clayton